

Cat. No. : 522
Description : 110-L oxygen cylinder

Type :

- Non-professional, for use with :
- Oxy-gas sets Cat. No. G2903 / 2902 / 2901

Applications :

- Braze welding, brazing, plumbing, air-conditioning, DIY

Includes the following :

- 110-L compressed oxygen cylinder
- Pressure: 110 bar
- Steel tank: 950 ml
- M10 valve x 100 – 6 g
- Holder

Unit weight and dimensions :

- Weight: 1,3 kg
- Diameter : 73 mm
- Height: 320 mm


Box weight and dimensions :

- Box of 6 cylinders
- Weight: 7,8 kg
- Width: 250 mm
- Depth: 170 mm
- Height: 330 mm

Recommendations :

- Single-use, non-rechargeable cylinder.
- Keep away from sunlight
- Do not expose to temperatures exceeding 50°C (122°F)
- Store in a dry, well-ventilated room

Picture :

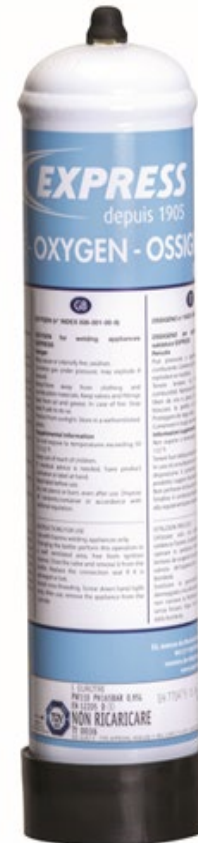

Safety Data Sheet (SDS) :

SDS N° 001

Compliance :

NF EN ISO 11118

Barcode

3 1896400005222 8

IMPORTANT: Read instructions before use

GUILBERT EXPRESS reserves the right to change products without prior notice. Actual products may differ from photographs.

www.express.fr

GUILBERT EXPRESS

10 rue Henry Delbast - 77183 Croissy-Beaubourg - Tel: 0.825.800.251 - Fax: 0.825.800.238